




TERRASOFT®-SLAB | 500x500x25

As a shape retaining and weather-resistant floor covering, the Terrasoft Panel 500 x 500 x 25 made of pure rubber granulate (1-3.5 mm) is suitable for use outdoors. It is bound and coated with polyurethane and impresses with its numerous advantages and application possibilities. The material cushions easily while walking and is therefore extremely gentle on the joints. But-crushed rubber granulate also impresses with its anti-slip surface. The slabs are permeable to water and the drainage arrangement on the underside of the slab prevents waterlogging.

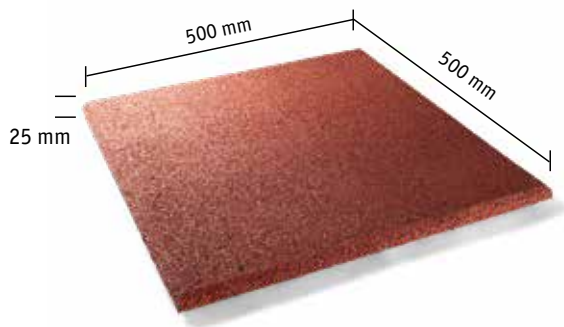


ADVANTAGES

- light slabs due to minimal thickness
- sound absorbing
- permeable to water / fast-drying
- low maintenance
- non-slip
- quick and easy installation
- barrier-free usable

APPLICATION

Due to the appealing format and the three attractive colour alternatives, the Terrasoft Slab 500 x 500 x 25 is ideal for decorative surface designs around the house. For example, it offers a secure floor covering for terraces, balconies, outdoor areas or wet areas around swimming pools.

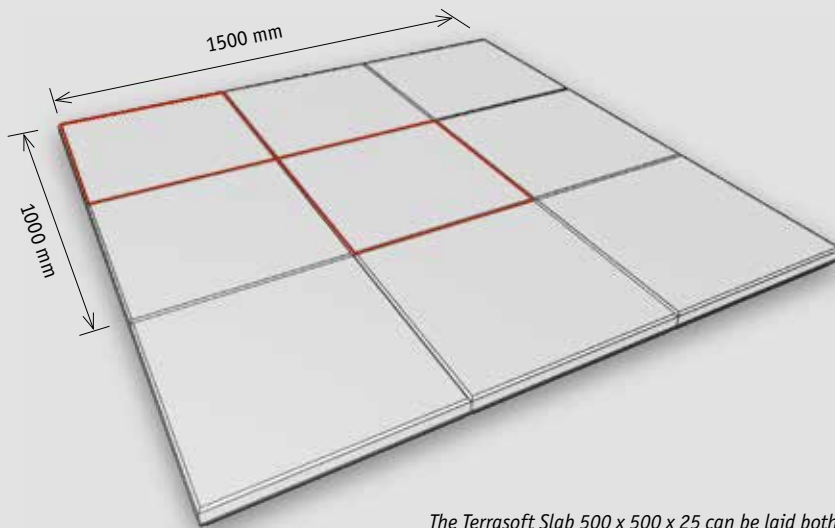

The Terrasoft Slab 500 x 500 x 25 can be laid both in staggered and cross joint.

INSTALLATION INSTRUCTIONS

Slabs up to a thickness of 30 mm must be laid exclusively on firm substrates and then glued to the substrate.

Laying on firm substrate:

An important prerequisite for the installation of slabs made of pure rubber granulate is the professional preparation of the substrate and the appropriate gradient. A smooth gradient screed with subsequently applied moisture insulation is most suitable as the water-bearing layer. Existing films and bituminous membranes must first be tested for their suitability as a substrate. A solid edging to maintain the position is essential. In order to ensure the desired position in the long term, the border slabs should be glued to the substrate.

Notes to selective glueing:

Before laying, the substrate must be compacted and fastened. Make sure that the adhesive surfaces are free of oil, grease and other residues, e.g. paint, rubber abrasion particles, etc.

Now lay the slabs on the prepared surface according to the installation plan

Pierce the membrane in the threaded part of the adhesive cartridge and screw on the cut plastic nozzle. Using a screwdriver, remove the bottom plate of the cartridge and insert it into the manual or pneumatic gun.

The bonding takes place on the completely cleaned underground by means of adhesive dots on the raised surfaces of the drainage.

The surface and ambient temperature must be at least 5 ° C. The panels should only be glued in dry weather. Adhesive cartridges must not be stored below 10 ° C.

Please note that the area should not be walked on for 48 hours.



Terrasoft Slab 500 x 500 x 25
redbrown



Terrasoft Slab 500 x 500 x 25
green



Terrasoft Slab 500 x 500 x 25
anthracite

Colours



-10x redbrown -12x green -13x anthracite

Specifications

