




Terrasoft®

Corner Covering

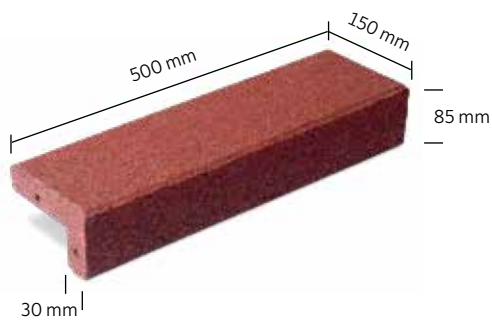

The Terrasoft corner covering made from pure rubber granules (1-3.5 mm, linear 2-5 mm) bound together and sheathed with polyurethane, and impressive with its numerous advantages and application possibilities. Patios and balconies, in particular, often lack a well thought-out finish to cover edges and ledges. You can design this quickly, easily and safely with the corner coverings. The slightly cushioned material is very forgiving even of small bumps, and prevents injuries at stumbling hazards. In the 30 mm thickness the elements adapt perfectly to the heights of terrace tiles.

Also very thoughtful: A corner element, matching the corner covering, is available that eliminates the need for elaborate mitre cuts and enables quick installation. Benefit from over 30 years of outdoor design know-how, which you will find in all our products.

ADVANTAGES


- covering for stumbling hazards
- fast and clean installation with system plugs
- barrier-free usable

APPLICATION

Angle and corner covers serve as external optical finishing of terraces and balcony coverings as well as wall coverings in the vicinity of playground equipment. For outdoor use.



Corner element 150 x 150 x 85 mm
Item no. 251030xx1

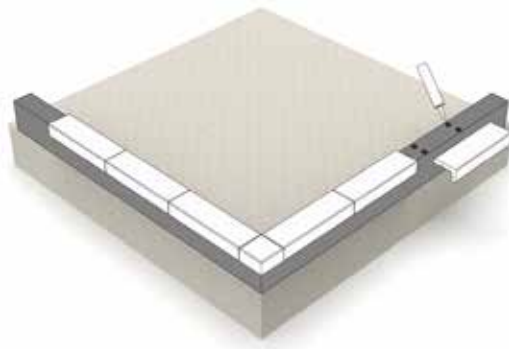

Connection of the individual elements using the system plugs as well as gluing on existing edgings or gradings.

INSTALLATION INSTRUCTIONS

Terrasoft Angular and corner profiles can be integrated into overall bon construction. Spot fixture in accordance with our gluing instructions is additionally required.

Our corner elements permits mounting without the need for a complex miter cut. When laying the slabs the plug-in holes should be pointing in the right direction for them to be used for the edge profile.

Laying on firm substrate:

An important prerequisite for the installation of Elements made of pure rubber granulate is the professional preparation of the substrate an the appropriate gradient. A smooth gradient screed with subsequently applied moisture insulation is most suitable as the water-bearing layer. Existing films and bituminous membranes must first be tested for their suitability as a substrate. To ensure the desired situational securing in the long term, the elements should be glued to the substrate.

Please follow the care instructions.



Terrasoft Corner covering
redbrown



Terrasoft Corner covering
green



Terrasoft Corner covering
anthracite

Colours



-10x redbrown -12x green -13x anthracite

Specifications



451008001
System plugs

360 Pcs.