




Terrasoft®

## Edge guard

Damage to tyres, rims, bumpers or side skirts of vehicles arise in particular through traffic control systems again and again. In multi-storey car parks, underground garages or in parking lots, conventional curbs made of concrete are used to regulate the traffic flow. These curbs can be retrofitted with the Terrasoft Edge Guard to avoid the above-mentioned damage to motor vehicles. The innovative element consists of rubber granulate and is simply placed on the already installed elements and point-glued. Alternatively, it can be screwed on. To spare tires and rims, the material gives way slightly, but remains stable when in contact with the vehicles.

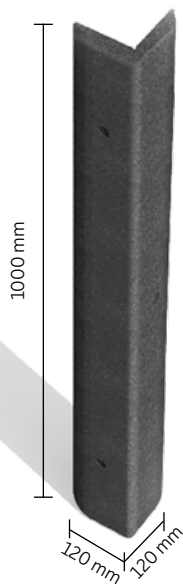



### ADVANTAGES

- easy to retrofit to existing traffic control systems
- rapid and simple installation
- made of highly compressed SBR rubber granulate
- Colour: black

### APPLICATION

The Terrasoft Edge Guard is used in garages, multi-storey car parks as well as underground garages. Here it can be retrospectively fitted to existing traffic control systems. It also protects vehicles from scratches and damage in the case of wall projections or edge boundaries on private or commercial properties.



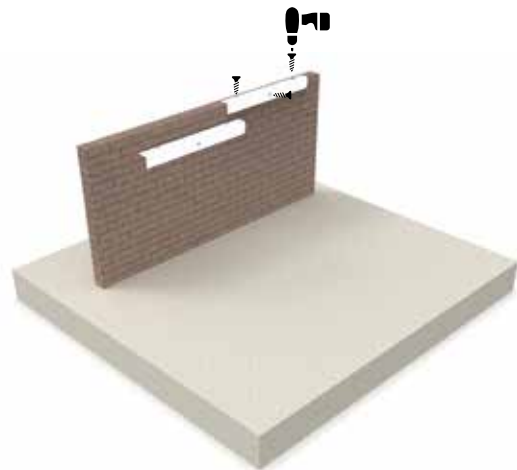

Screwing the Terrasoft Edge Guard.

## INSTALLATION INSTRUCTIONS

Terrasoft Edge Guard has to be doweled onto walls or palisades through the holes pre-fabricated. The installation of the Edge guards can also be supported by a selective gluing if necessary.

### Notes to selective gluing:

Make sure that the adhesive surfaces are free of oil, grease and other residues, e.g. paint, rubber abrasion particles, etc. Now glue the Edge guard on the prepared subsoil. Pierce the membrane in the threaded part of the adhesive cartridge and screw on the cut plastic nozzle. Using a screwdriver, remove the bottom plate of the cartridge and insert it into the manual or pneumatic gun.

The bonding takes place on the completely cleaned underground by means of adhesive dots on the back side of the Edge guard.

The surface and ambient temperature must be at least 5 °C. The Elements should only be glued in dry weather. Adhesive cartridges must not be stored below 10 °C.



Terrasoft Edge guard  
black

### Colours



-13x  
black

### Specifications

