




Terrasoft®

Kerbstone ramp XL

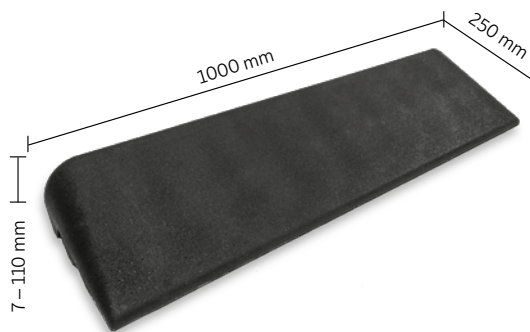

Driving into curbs often causes damage to tyres or rims. Defects on the running gear or the suspension are the unpleasant consequence. The Terrasoft kerbstone ramp makes it easier to drive onto curbs, forming a smooth transition between road and curb. In contrast to improvised solutions made of wood or concrete, the kerbstone ramp made of rubber granules with a variety of grades has numerous advantages: it can be removed temporarily, for example when cleaning the street mechanically, or in the winter months when snowploughs are on the roads. Since the ramps are very light this is quite easy. The integrated drainage allows fast drainage of dirty water. The material is very robust and withstands the permanent load caused by the weight of the car.

Note: Permanent use in public is at your own risk.

ADVANTAGES


- trip protection because of flattened edges
- tyre preserving
- easy to install: simply lay – ready
- frost proof
- no weeds anymore: volunteer proof
- additional drainage: adjusts unevennesses on the floor

APPLICATION

The Terrasoft kerbstone ramp is used wherever a seamless, barrier-free transition from one level to another is necessary. On the one hand, this is the transition from road to curbs, for example at yard and garage entrances. On the other hand, it is the perfect aid for strollers, rollators or wheelchairs when overcoming stumbling blocks up to 12 cm. On construction sites or company premises, where daily hand trucks are used, the Terrasoft kerbstone ramp facilitates the daily work.

**MORE
INFORMATION**



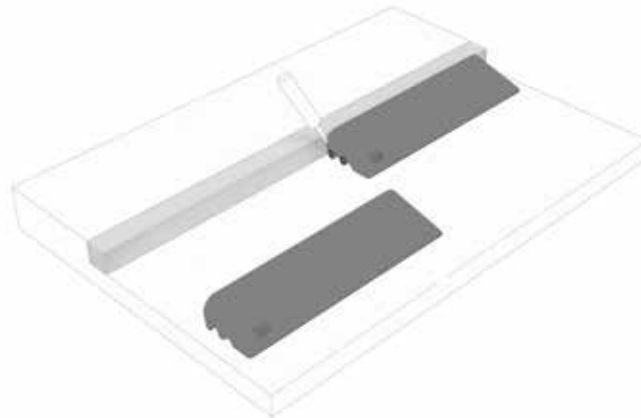

An absolutely perfect solution: the Terrasoft kerbstone ramp is simply laid on steps or kerbstones – barrier-free and clean!

INSTALLATION INSTRUCTIONS

In order to ensure additional stability of the elements with each other, it is recommended to apply a spot adhesive with the cartridge adhesive (Item-no. 452500131).

Notes to selective gluing:

Pierce the membrane in the threaded part of the adhesive cartridge and screw on the cut plastic nozzle. Using a screwdriver, remove the bottom plate of the cartridge and insert it into the manual or pneumatic gun.

The bonding takes place on the completely cleaned underground by means of adhesive dots on the back side of the two beiden Kerbstone ramps. According to local belongings (e.g. snow-cleaver, mechanical road cleaning etc.) the kerbstone ramps must be temporarily removed. So just glue the two kerbstone ramps together at the herms, Do NOT glue them with the ground.

The surface and ambient temperature must be at least 5 ° C. The Elements should only be glued in dry weather. Adhesive cartridges must not be stored below 10 ° C.



Terrasoft Kerbstone ramp XL
black

Colours



-13x
black

Specifications



Spare parts



4525001x1
Gluing