




Terrasoft® Path bordering

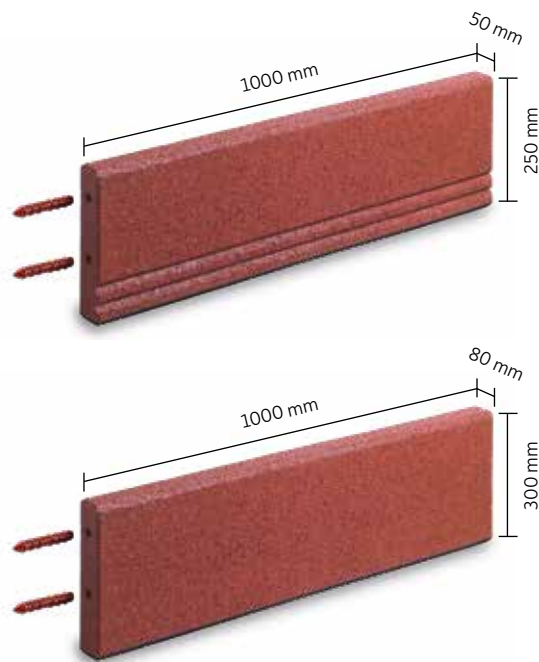

Terrasoft path bordering made of pure rubber granulate are versatile surrounds for gardens, lawns and flower beds. As a path borders, the profiles provide the necessary lateral support between the pathway and flowerbeds or parking areas. To limit areas made of elastic panels or paving, they offer a stable edging and a visually perfect finish, for example, on terraces or driveways.

Different materials such as turf, topsoil or gravel are kept separated - the garden is easier to maintain. The Terrasoft path borderings are flexible and can be made into different shapes, so that in addition to the border of terraces and individually designed fields, individuality can be realized in flower beds.

ADVANTAGES

- optically fitting edge termination to the Terrasoft Floor and Paving Stone systems
- easy installation
- flexible use
- non-slip transition

APPLICATION

Path bordering provides flexible verges for playing fields and running tracks in the sports and leisure facilities sector. In addition, they are used in the design of driveways, parking lots or paths in the outside areas of houses.



with Floor anchor
Item no. 252000902



Path bordering 1000x50x250 mm
with steel inlay, Item no. 2520001x4




Path bordering 1000x80x300 mm
with steel inlay, Item no. 2520301x4

Terrasoft® Path bordering (L x W x H) 1000 x 50 x 250 mm | SBR rubber granulate | Item no.: 252000xx1
 Terrasoft® Path bordering (L x W x H) 1000 x 80 x 300 mm | SBR rubber granulate | Item no.: 252030xx1



Path borderings without ground anchor.

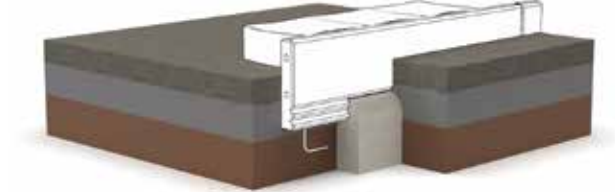

Path borderings with the ground anchor are fixed into a concrete foundation.

INSTALLATION INSTRUCTIONS

Path edging must be installed in a concrete bed on a suitable substrate. The abutting edges are secured with system plugs. The installation always depends on the local conditions. Create a frost-proof layer under the foundation (gravel or lava, compact after laying on the ground). The path borderings are placed in a strip foundation made of concrete.

Path edging with foundation anchor can just out of the rubber flooring, as additional support in the foundation anchor can jut out of the rubber flooring, as additional support in the foundation is obtained through the metal inlay.

Path edging with steel inlay can be performed e.g. for the course of curve.

GENERAL INSTRUCTIONS

Production-related influences require larger manufacturing dimensions of up to 5 mm in length and width, which is evened out after a storage of 48 hours. It is necessary to check the dimensional accuracy before starting the laying. With regard to length and width, dimensional tolerances of +/- 1% are permissible. Thickness tolerance is +/- 2 mm. Minimal colour deviations between one another and from the colour charts are unavoidable as a result of production processes. The surface of the Terrasoft Element must be protected from permanent exposure to sharp-edged stones or similar. When using or storing the products in a permanently moist environment, changes in shape, foxing, algae formation and similar moisture-related phenomena are possible.



Terrasoft Path bordering
1000 x 50 x 250 | redbrown



Terrasoft Path bordering
1000 x 50 x 250 | green



Terrasoft Path bordering
1000 x 50 x 250 | anthracite



Terrasoft Path bordering
1000 x 80 x 300 | redbrown



Terrasoft Path bordering
1000 x 80 x 300 | green



Terrasoft Path bordering
1000 x 80 x 300 | anthracite

Colours



-10x redbrown
-12x green
-13x anthracite
-09x grau

Specifications



100 Pcs.
Path bordering
1000 x 50 x 250



56 Pcs.
Path bordering
1000 x 80 x 300